



Edge Shield Gravel Stop

- Applicable with most roofing systems
- Installation with continuous 20 gauge galvanized cleat
- Pre-punched holes for proper fastener placement
- ANSI/SPRI ES-1 tested
- International Building Code (IBC 2003 & 2006) compliant*
- Concealed splice plates (optional)
- Flange dimension fabricated to suit roofing system requirements
- Standard finish is PVDF fluoropolymer coating in 29 standard and metallic colors. Custom colors are available
- 20 year finish warranty

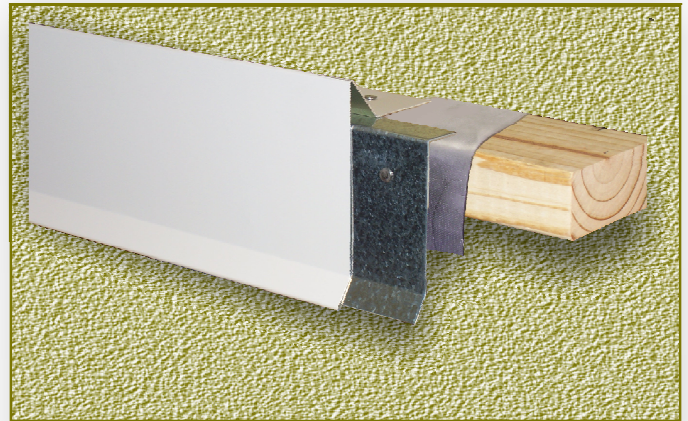

**ANSI/SPRI ES-1
Tested Product**

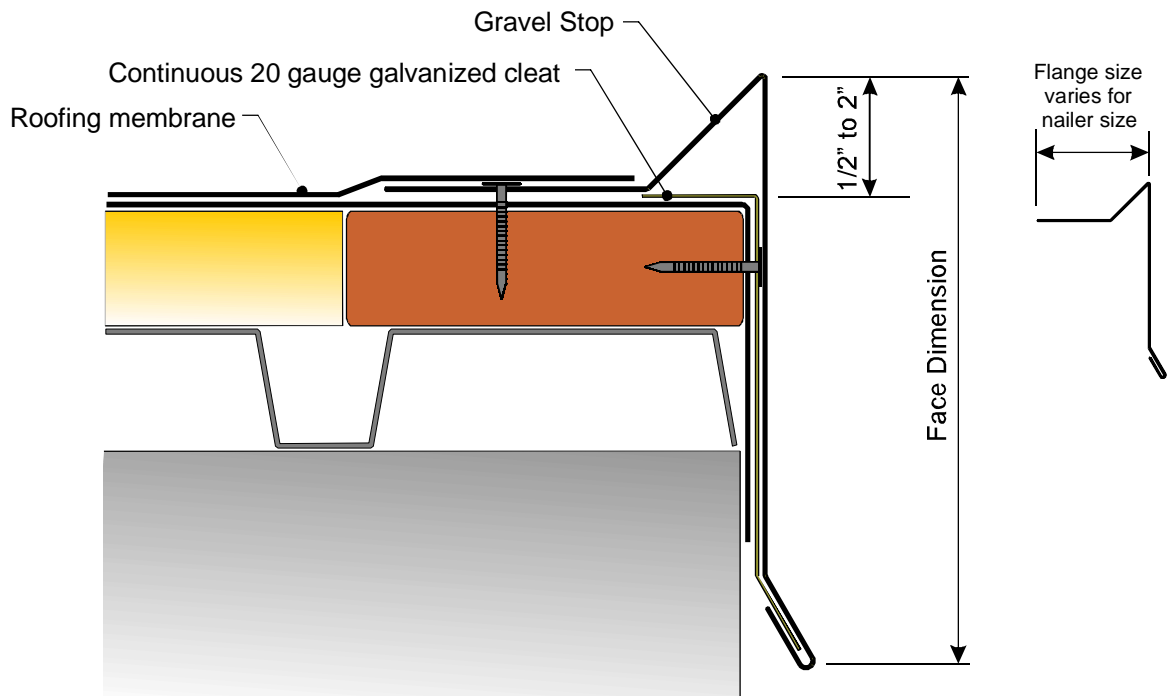

Material Options:

- 24 gauge (0.63 mm) galvanized steel
- 22 gauge (0.76 mm) galvanized steel
- 24 gauge (0.063 mm) stainless steel
- 0.040" (1.0 mm) aluminum
- 0.050" (1.2 mm) aluminum
- 0.063" (1.5 mm) aluminum

Finish Options:

- Standard Kynar 500® colors (see color chart for availability)
- Custom Kynar® colors
- Plain galvanized steel or "paintgrip"
- Mill finish aluminum
- Anodized aluminum
- 2B finish stainless

*** International Building Code requirement:**

2003 IBC § 1504.5: "Edge securement for low-slope roofs. Low-slope membrane roof systems metal edge securement, except gutters, installed in accordance with Section 1507, shall be designated in accordance with ANSI/SPRI ES-1, except the basic wind speed shall be determined from Figure 1609."

Kynar 500® is a registered trademark of Arkema, Inc. Information subject to change without notice. Refer to MPSI installation instructions and details for additional information.



10346 Evendale Drive, Cincinnati, Ohio 45241-2512

Tel: 800-554-6126, 513-554-6120 Fax: 513-554-6121

www.metalpanelsystems.com

Mpsi2009/pds-esgravelstop