



MP-100 Panel

- Architectural (solid substrate)
- Snap on seam allows panels to be installed in two directions
- Application on 3:12 slopes and greater
- Continuous panel lengths. Field forming available.
- Panels expand and contract freely
- One-piece concealed clip
- Ideal for roof slope transitions or eave turn-down detail
- CURVING: MP-100 Panel can be curved concave or convex (consult MPSI for minimum radius requirements)
- TAPERING: MP-100 Panel can be tapered for conical shaped roof structures
- Standard finish is PVDF fluoropolymer coating in 29 standard colors (Custom colors available)
- 20 year finish warranty
- Cool Roof colors available (24 colors). Meets EPA Energy Star Products Program performance criteria.

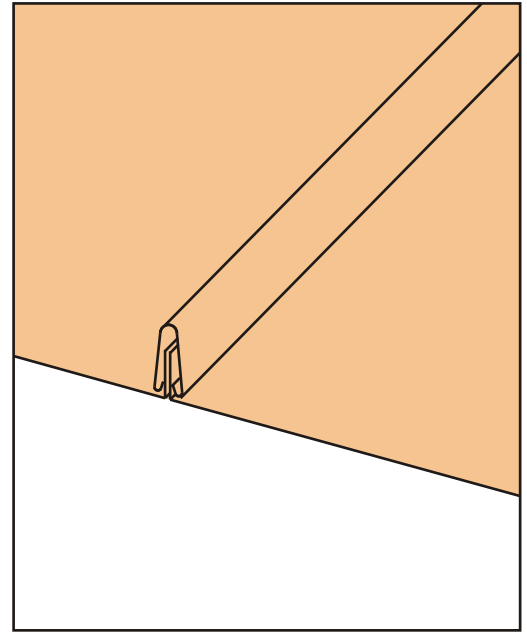


Panel Profile

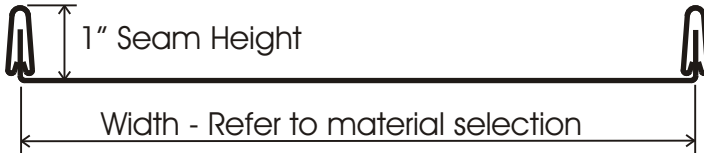

Material	Standard Width	Optional Widths
24 ga. Steel	14-1/2"	12", 18-1/2"
.032" Aluminum	12"	14-1/2"
16 oz. Copper	13-1/2"	12, 18-1/2"


Optional widths require minimum quantities and slightly longer lead times. Other materials and gauges are available. Minimum quantities may apply. Custom widths are available. Consult MPSI for costs and lead times. Oil canning: Metal Panel Systems, Inc. purchases prime commercial grade light gauge metal which is manufactured to all industry accepted tolerances. "Oil canning" is an inherent part of light gauge cold formed panels and is not cause for rejection.

Panel Clip




MP-100 Standard Clip (MP100SC)

Optional Surface Patterns

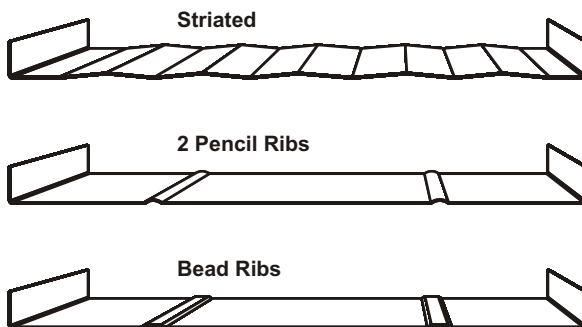

Seam Profile

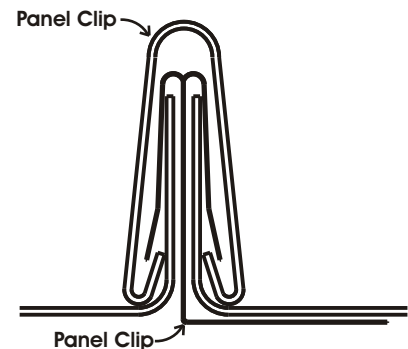

Refer to product installation instructions for additional information.